


Programming the motor

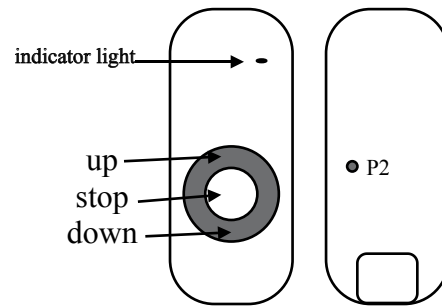

Motor on left

Motor on right

Plug motor in to power outlet. (small beep). Within 4 seconds, depress P2 button on back of remote 2 times. (quiet beeps each time). Press the 'up' button to set to left hand motor. Press either 'up' or 'down'. Motor will turn and stop by itself. There are 2 possible set ups.

Plug motor in to power outlet. (small beep). Within 4 seconds, depress P2 button on back of remote 2 times. (quiet beeps each time). Press the 'down' button to set to right hand motor. Press either 'up' or 'down'. Motor will turn and stop by itself. There are 2 possible set ups.

White on top / Red on bottom



Using the supplied hex tool, turn the white adjuster counterclockwise to adjust the 'up' limit.



Turn the red adjuster counterclockwise to adjust the 'down' limit



Using the supplied hex tool, turn the white button clockwise to adjust the "down" limit.



Turn the red button clockwise to adjust the "up" limit.

Red on top / White on bottom



Using the supplied hex tool, turn the red adjuster clockwise to adjust the 'down' limit.



Turn the white adjuster clockwise to adjust the 'up' limit



Using the supplied hex tool, turn the red button counterclockwise to adjust the top limit.



Turn the white button counterclockwise to adjust the bottom limit.